MB QUART®
MUSIC. DEFINED.

Instalation Instructions

Model:	2014 - 2023 Harley Davidson Streetglide Platform
Description:	140 Watt 6.5” 3-Way Coaxial Speaker System
Part Number:	HC1-116DT
Assembly Time:	90 Min (1.5-Hours)

It is always best practice to disconnect your negative battery terminal prior to any electronics installations to avoid damaging the vehicle’s electrical system. Before you begin, read through these instructions and check that all parts are present.

This installation may require special skills and tools to complete and it may be necessary to seek a trained installation technician to complete this installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

Parts List		
No.	Component Name	Qty
1	6.5” 3-Way Coaxial Speaker	2
2	Speaker Grill	2
3	Foam Gasket	2
4	M4 x 25 Flat Head Philips Screw	8

Tools Required	
1	Bojo or Panel Tool
2	Philips Screwdriver
3	T25 & T27 Torx Driver
4	5/32” Allen Driver
5	7/16” Socket
7	Rachet
8	Utility Knife

Fairing Disassembly


- Removal (3) T27 Torx screws from lower windscreen.



- Remove (4) T27 Torx screws on the inner fairing. Two on the right side and two on the left side.




- Lift up the outter fairing, then disconnect the headlight connector. Set fairing aside in a safe location.

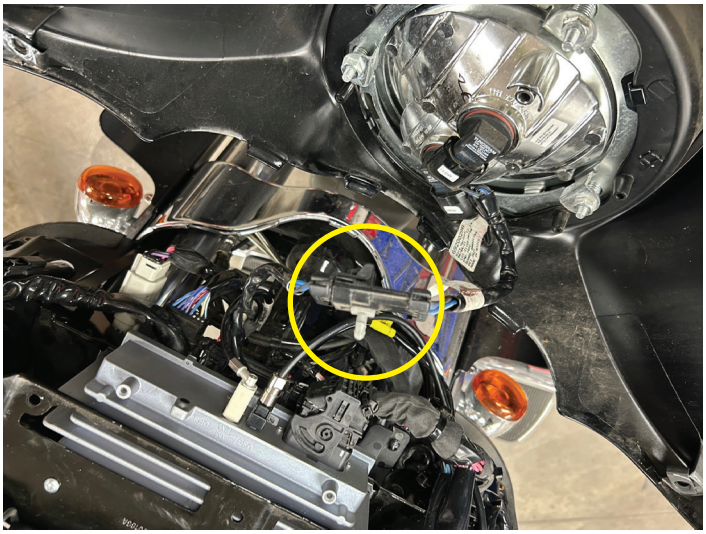


Fairing Disassembly

- Remove (2) T27 Torx screws from fairing vent and remove.

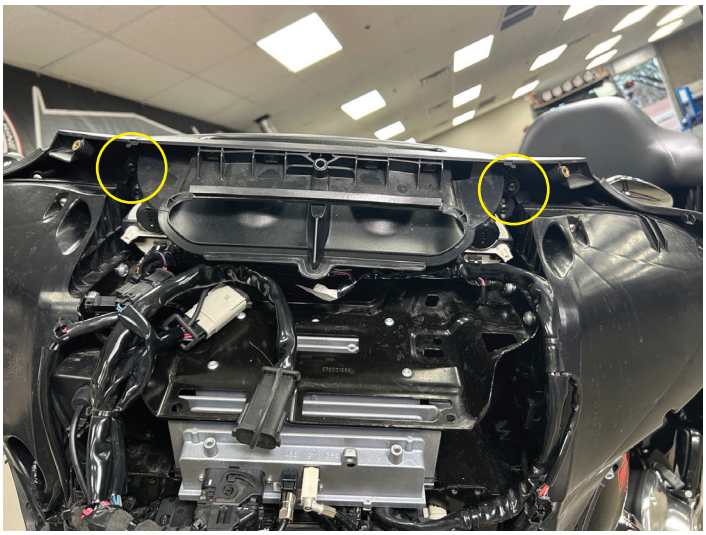

- Disconnect the wiring connectors from the outter two gauges. Then using a panel removal tool release the two fir tree zip ties mounted to the gauges. This will aid in the next step of removal.

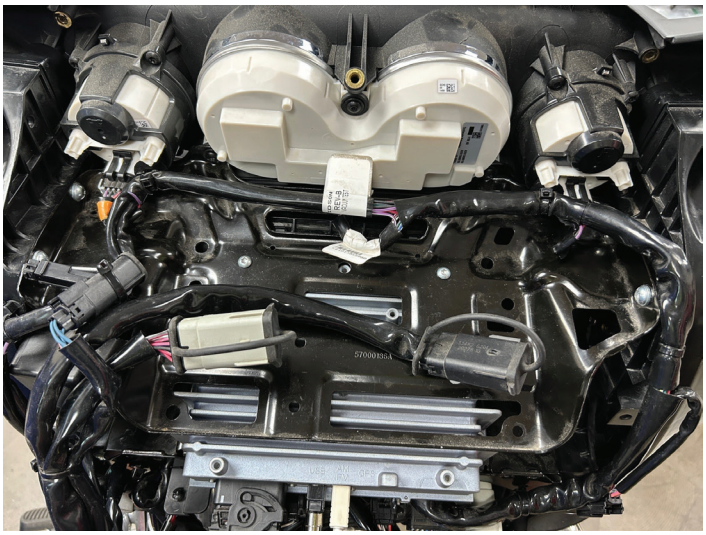

- Using a 5/32” Allen, remove (2) upper screws on the OE pod and repeat on the other OE pod.



Fairing Disassembly

- Remove (3) 7/16” lower bolts located near the forks holding the OE pod. Repeat on the other OE pod.




- Disconnect the wiring connectors from the OE pods. You may also need to disconnect wiring secured to pods with fir tree zip ties.



- Using a 5/32” Allen, remove (3) screws on the OE pod and repeat on the other OE pod. On the right hand side you will need to disconnect the Aux port connection.



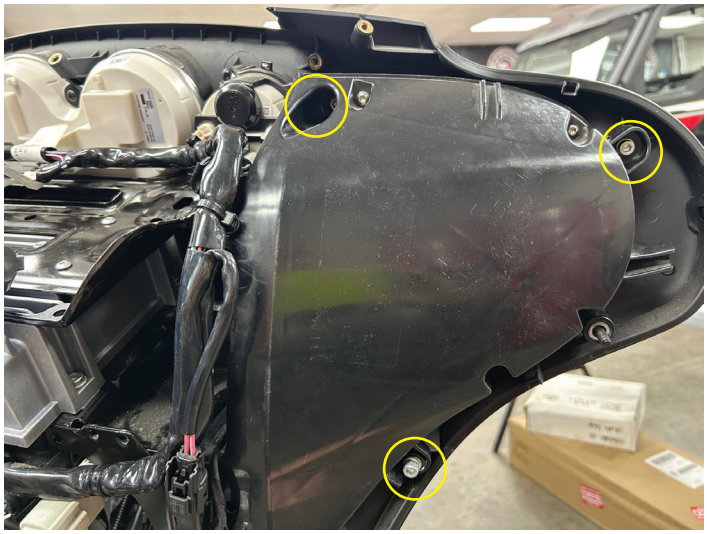


Fairing Disassembly

- Remove OE pods from the bike.




- Remove (3) T27 screws from OE grilles and remove from fairing.

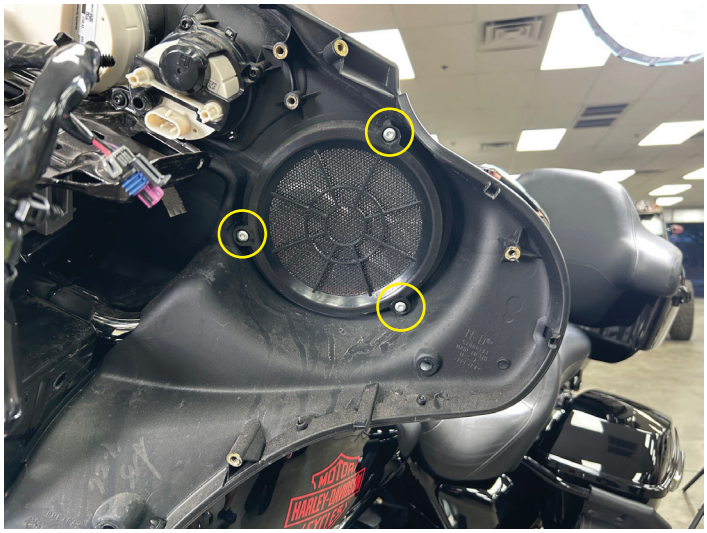


HC1-116DT Installation

- Remove (4) T25 Torx screws from OE speaker. Then disconnect wiring from back of speaker. Repeat on other pod.

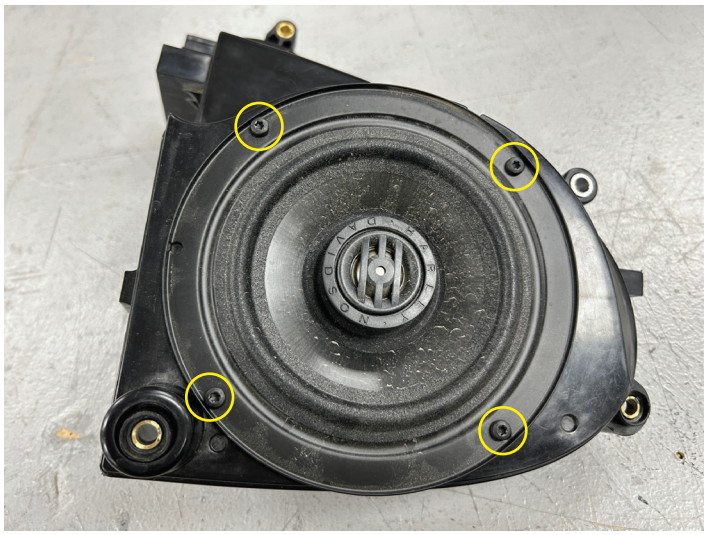

- Using a utility knife remove the alignment tab from the OE pod.

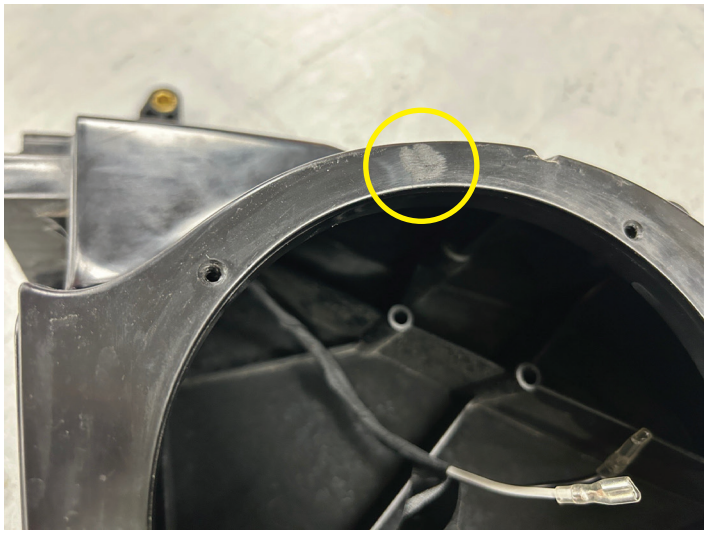


- Remove the paper tape on the HC1-116DT speaker. Then stick the grille to the speaker aligning the screw openings.



HC1-116DT Installation

- Connect the OE wiring to the HC1-115DT speaker and place into the OE pod.

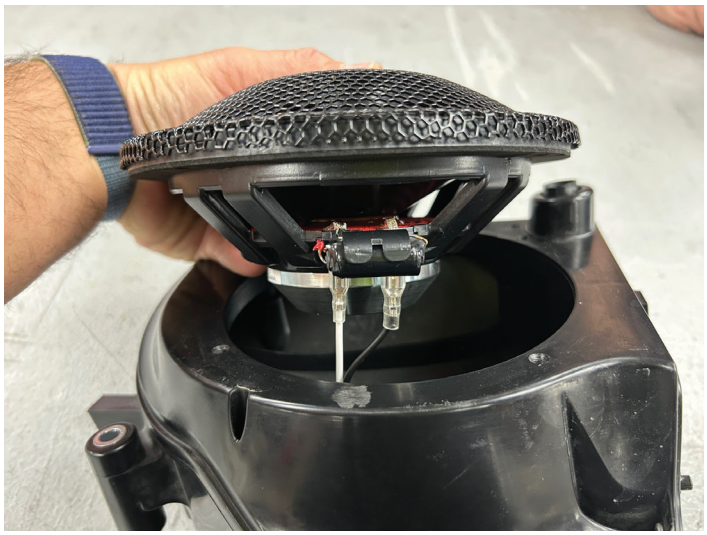

- Secure the HC1-116DT speaker with the supplied (8) M4 x 25mm flat head Philips screws.
- Align the additional gasket on top of the grille.





- Reinstall the OE pods into the bike in the reverse order.
- Listen to the audio before re-assembling the fairing in the reverse order.



FCC Notification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, this equipment may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

MBQuart.com
#MUSIC DEFINED

WARRANTY

Maxxsonics, LLC. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics, LLC. will, at it's discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics, LLC. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation, and freight are not the responsibility of Maxxsonics, LLC. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.

MB Quart products are designed and engineered in the USA by

MAXXSONICS®

www.maxxsonics.com