Installation Instructions

Model:	2021-2024 Ford Bronco
Description:	Rear Speaker Pod Kit
Part Number:	BC1-116
Assembly Time:	60 Min (1Hours)

It is always best practice to disconnect your negative battery terminal prior to any electronics installations to avoid damaging the vehicle's electrical system. Before you begin, read through these instructions and check that all parts are present.

This installation may require special skills and tools to complete and it may be necessary to seek a trained installation technician to complete this installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

Parts List		
No.	Component Name	Qty
1	6.5" Coaxial pods	1
2	St4.2x19mm T20 Torx Screws	6
3	M4 washers	6
4	Upper Brackets for 4 door installation only	2
5	lower brackets	2

Tools Required	
1	Bojo or Panel Tool
2	Rachet
3	T20 & T30 Torx

2 Door Rear Speaker Install

- Starting on the passenger side of vehicle. Use a trim removal tool to gently pry the grill away from the OEM rear speaker pod. Disconnect the wire connector.



- In a 2 door vehicle, remove (2) T20 screws from the top of plastic speaker pod and leave the factory bracket attached to the ROPS.



- Remove (1) T30 bolt and bracket holding the speaker pod to the side of the ROPS and remove POD from vehicle.



2 Door Rear Speaker Install

- 2 door - Attach small bracket that comes in kit to the bottom of new pod with (1) T20 screw.



- Connect your speaker connector and tuck into factory trim cover and follow same procedures on Driver side.



- Hold pod up to factory bracket in vehicle and install (2) T20 screws to mount pod to factory bracket.



2 Door Rear Speaker Install

- Reinstall (1) T30 bolt into side ROPS securing the pod in place.



4 Door Rear Speaker Install

- Starting on the passenger side of vehicle. Use a trim removal tool to gently pry the grill away from the OEM rear speaker pod. Disconnect the wire connector.



- Remove (2) T30 bolts holding the pod bracket to the ROPS and (1) T30 bolt holding the bottom of the pod to the ROPS.



- Remove (1) T30 bolt and bracket holding the speaker pod to the side of the ROPS and remove POD from vehicle.




- Remove (2) T30 bolts holding the factory bracket onto the pod and set aside.



4 Door Rear Speaker Install

- Install the new brackets to our pod using (3) ST4.2x19mm T20 screws included in the kit.

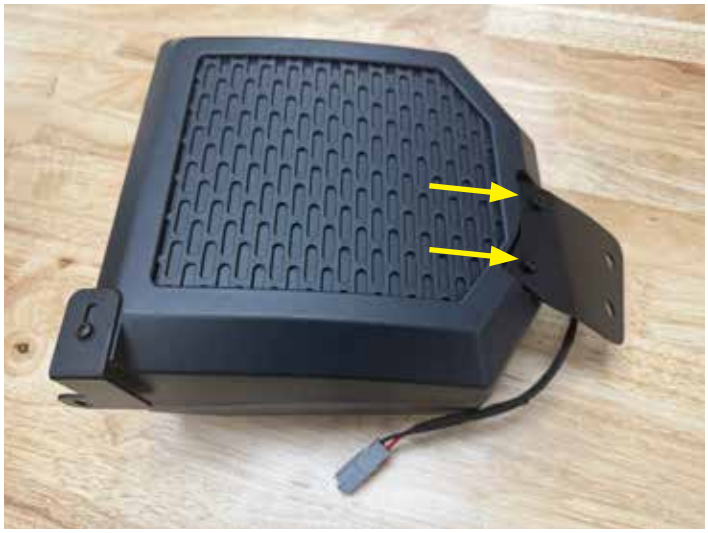

- Connect your speaker connector and tuck into factory trim cover and follow same procedures on Driver side.



- Bolt pod back onto ROPS using (3) T30 bolts removed in earlier step.





FCC Notification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, this equipment may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

MBQuart.com
#MUSIC DEFINED

WARRANTY

Maxxsonics, LLC. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics, LLC. will, at it's discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics, LLC. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation, and freight are not the responsibility of Maxxsonics, LLC. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.

MB Quart products are designed and engineered in the USA by
MAXXSONICS®

www.maxxsonics.com