Installation Instructions

Model:	2024+ Jeep JL (Wrangler) & JT (Gladiator)
Description:	Rear Speaker Kit
Part Number:	JC2-169SB
Assembly Time:	120 Minutes (2 Hours)

It is always a best practice to disconnect your negative battery terminal prior to any electronics installations to avoid damaging the vehicles electrical system. Before you begin, read through these instructions and check that all parts are present.

This installation may require specials skills and tools to complete, it may be necessary to seek a trained installation technician to complete this installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

Parts List		
No.	Component Name	Qty
1	6x9 Coaxial Speakers	2
2	Speaker Grills	2
3	Harness Adapter	2
4	6x9 Cutting Template	1

Tools Required	
1	5mm Allen Bit
2	T15 & T20 Torx Bit
3	Rotary Cutting Tool (i.e. Dremel)
4	Marker

Rear Speaker Installation

- Remove (4) 5mm Allen bolts to remove the OEM Grill. Disconnect the map light harness.




- Remove and disconnect (5) T30 Torx screws from the port and (5) T20 Torx screws from both speakers.



- Place included cutting template over speaker holes, Mark the outer edge of the 6x9 shape.

NOTE
DO NOT MARK around the template location holes.

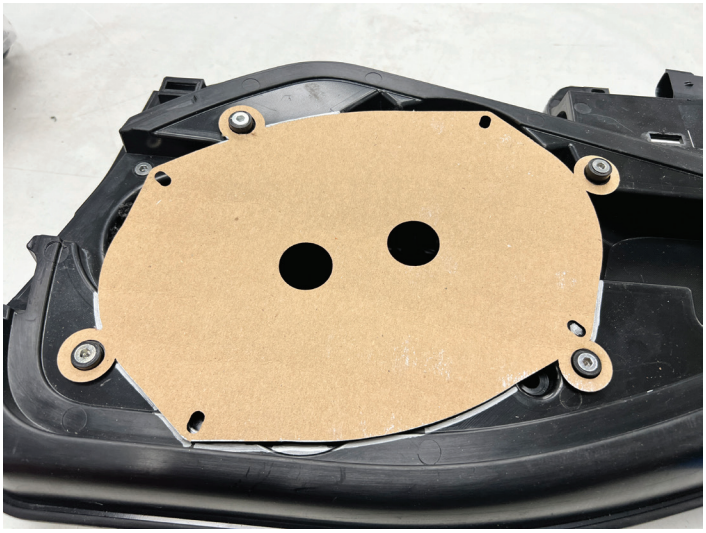


Rear Speaker Installation


- Remove 6x9 cutting template to show cut lines. Using a rotary cutting tool, cut along the marker lines leaving a hole similar to the picture on the right.

NOTE

BE VERY CAREFUL not to cut the OEM wiring as this will be re-used for the 6x9 speaker and map lights.

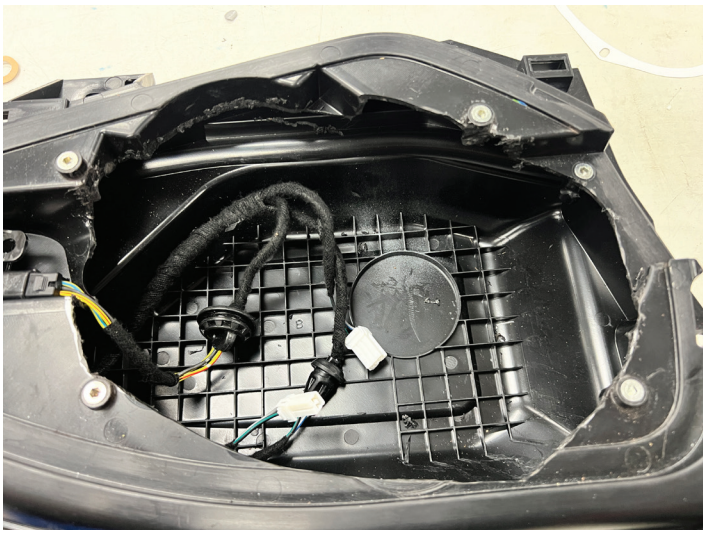

- Stick provided foam pads in these two locations helping to seal the rear sound wave of the speaker into the soundbar and connect the speaker harness included in the kit to smaller white connector.

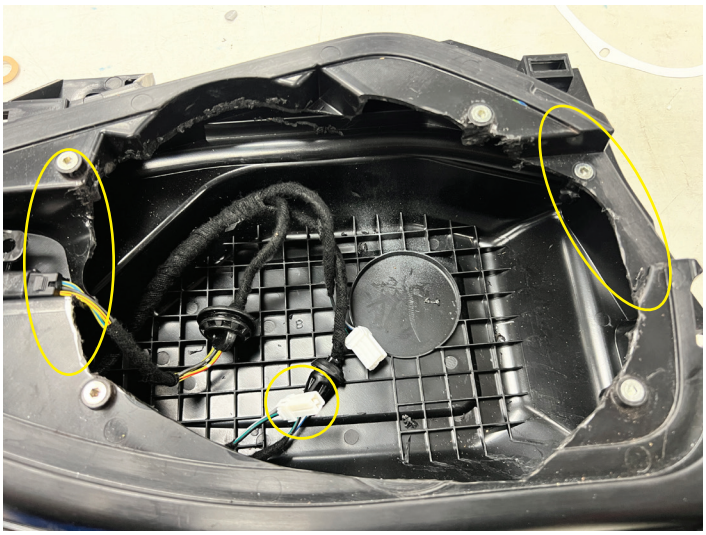

- Remove the Map light from each OEM grill. Attach the map light to the back of the new grill using the T15 OEM screws that held it on to the OEM panel.



Rear Speaker Installation

- Plug in the map light and connect the speaker wires. Set grill back onto the soundbar and install the (5) 5mm OEM screws



FCC Notification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, this equipment may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

MBQuart.com
#MUSIC DEFINED

WARRANTY

Maxxsonics, LLC. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics, LLC. will, at it's discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics, LLC. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation, and freight are not the responsibility of Maxxsonics, LLC. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.

MB Quart products are designed and engineered in the USA by

MAXXSONICS®

www.maxxsonics.com